Double Scissor Lift Electro-hydraulic
DM3.0_ECO

Description:
- Surface installation.
- Flat structre, lowest height is 105 mm
- Extension pads for vaious types of vehicles.
- Pneumatic safety ratchet construction.
- Run-on ramps can be locked in horizontal position.

Technical Data:

Capacity:	**3000kg**
Air Supply:	**6-8 bar**
Power Supply:	**400V/3ph/50Hz/2.2KW**
	230V/1ph/50Hz/2.2KW

Installation

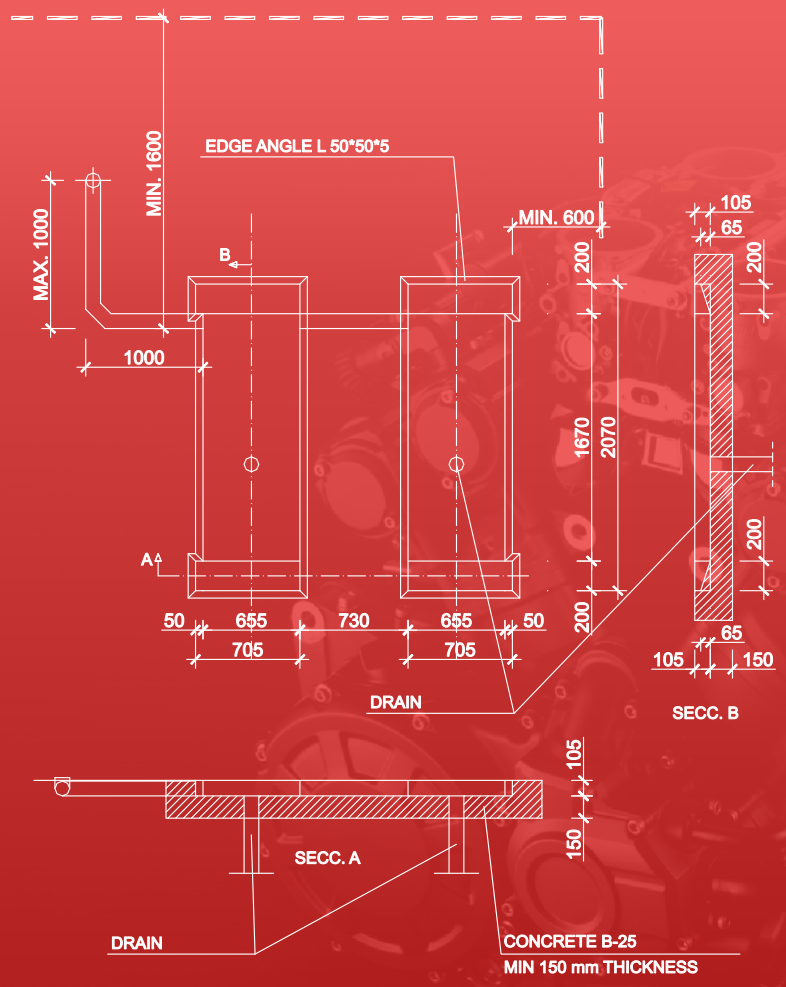

Dimensions

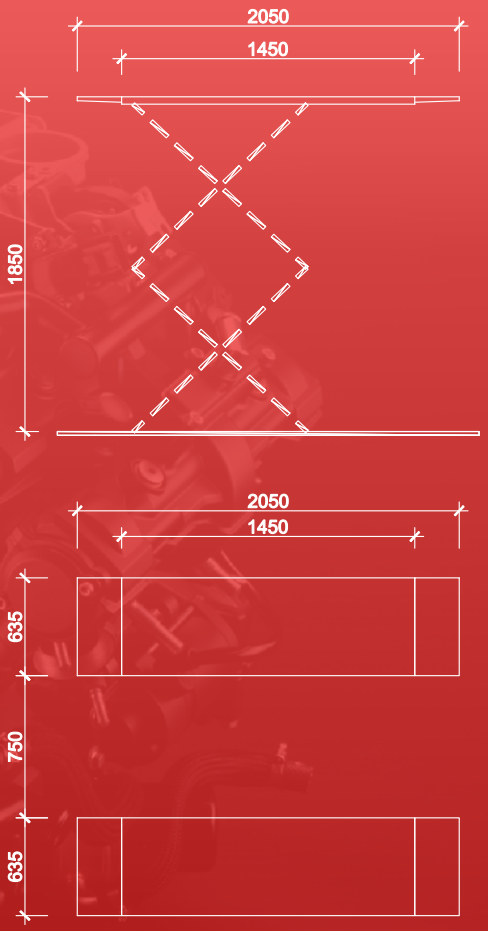

CE - EN1493:2010 - Approved
Warranty 14 month